

ТЕРМОРЕГУЛЯТОР

terneo pro

простое управление теплом



Использование ТЕРМОРЕГУЛЯТОРОВ это:

RU C-UA. 16. .04211
23.04.2015 22.04.2020



004/2011



terneo pro

3

c

16

« »



/		
1		5...35 ° 5...60 °
2		16
3		3 000
4		220 ±10 %
5		0,18 ±10 %
6		60 × 60 × 25 мм
7		10 ±5 % 25 °
8		3
9	- - ..	50 000
10	- - ..	100 000
11		1 °
12		1-10 °
13	14254	IP20

Комплект поставки

- 1 .
- 1 .
- 1 .
- 1 .



1 2.

(220 ±10 %, 50)
4
5, (L)


5, (N)

4.

3 6

(

).



1.




-5...+45 °

0,4 1,7

()

2.

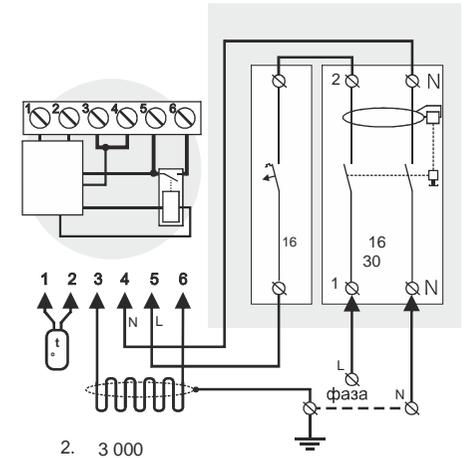

16

« »


60

(.1).


2,5 ²

3

0,5

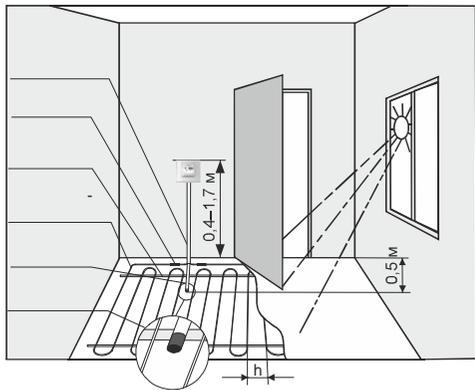

1.

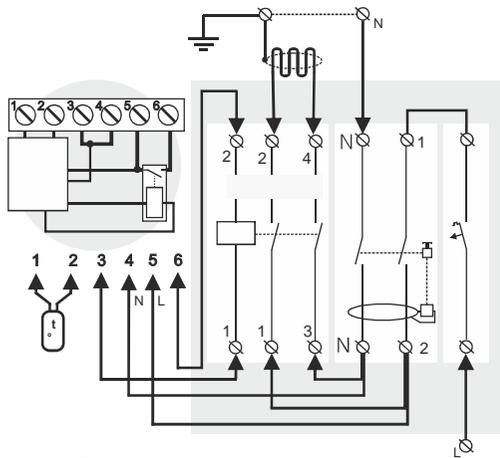

3.



2.

2/3

— 2 × 1,0

— 2 × 1,5

	±5 %
5	25339
10	19872
20	12488
30	8059
40	5330



	23 °	18 °
	30 °	25 °
	06:00 - 08:00	08:00 - 17:00
	17:00 - 22:00	22:00 - 06:00
	08:00 - 23:00	23:00 - 08:00



5

